


What is all the buzz about going curb-less?



Curb-less showers were originally designed to provide a more accessible shower for all ages and abilities. They have now become one of the most in-demand, aesthetically pleasing features in any size bathroom within the home. Offering a curb-less shower option to your customers will set you apart in the competitive economy we have today! Who installs a curb-less system? YOU, the builder, the plumber, the tile installer... the truth is - *any* trade on the job could become the installer.

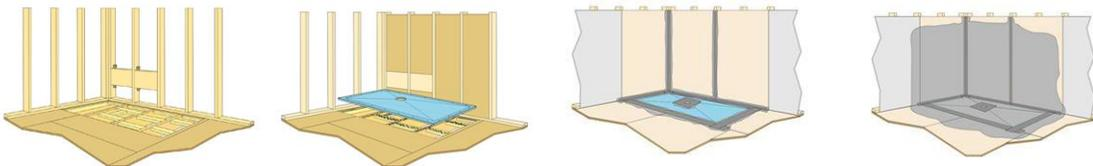


ARC TrueDek Classic Bases are structural, pre-sloped pans available in 15 different sizes with a 4" square drain. This product is 7/8" thick and

was designed to span 16"-on-center joist systems as well as hold up to 840 lbs. **You do NOT need to notch, cut, or tamper with structural joists in any way.** Installation in a nut shell; you cut out your subfloor, add blocking around the perimeter of the base and drain, put down construction adhesive, place your pan, screw it down, connect drain, seal joints, and waterproof – DONE! If necessary, you can trim the pan down up to 6" from the drain or mud out the difference to obtain the exact shower size desired. This system accommodates an ABS or PVC connection and you do not need access from below for installation. The drain location on a classic ARC base is not quite centered, this way you can rotate the pan to miss a joist or other obstacle. When ordering the classic base system, you only need three SKUs; the required pan size, the waterproofing kit, and the drain in the desired style and finish.



TrueDek Classic Drains are constructed of stainless steel and ABS plastic. Each drain comes complete with the drain body, decorative grate, drain gasket, and the waterproofing compound to create a completely watertight drainage system. All drains include a 2" PVC solvent weld shower drain line connector. These drains can be adjusted to meet the height of the tile being used, starting at 1/4" and up to a maximum height of 1". The grate height can be adjusted up to the exact height of the tile to ensure proper water flow. With a 2" diameter waste line connection it will handle a water flow rate of approximately 6-7 gallons per minute.

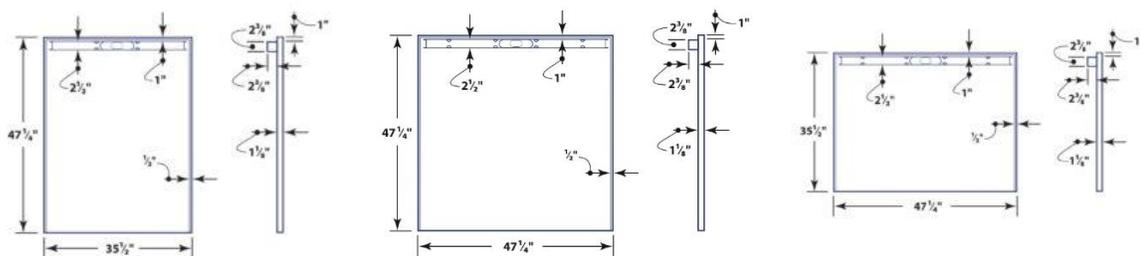

ARC linear shower pans, also known as ShuffleDek bases, are used when building a curb-less shower system where large format tile is desired.

